

# MA6 Contact Printer Quick Start Guide

Pre-Start: Turn on Compressed Air and Vacuum



1. Power to start

2. Check with N2 level (between 1 and 2) and then push the start



3. Wait for 15min and Turn on the main switch

4. Push Change Mask to change/load a mask

5. Load a mask (make sure that vacuum is on)

6. Edit Parameters

7. Change exp. time etc.

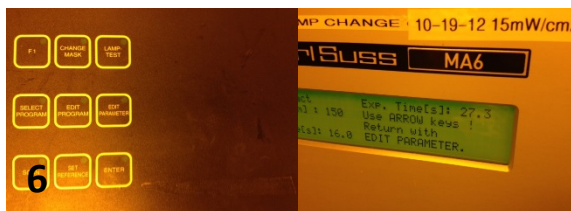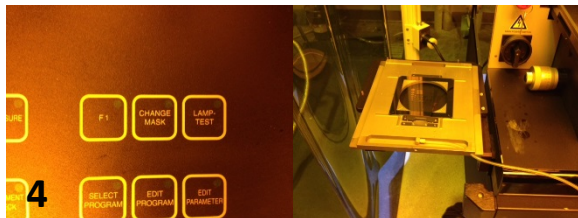

• At every steps, follow the instruction on the display panel